

» PASSENGER , UHP, SUV & 4X4 TYRES
UNITED KINGDOM

2025 PRODUCT CATALOG



accelera
SPEED 'N STYLE TYRES

ACCELERA TYRES ARE ULTRA-HIGH PERFORMANCE TYRES DESIGNED FOR ELEGANCE AND SAFETY.

Made in Indonesia, Accelera's mindset is that tread life should be long, tyres should be fast and that safety and performance can get along just fine – given the right tyre.

Although Accelera makes a complete portfolio of tyres consisting of applications for passenger car, SUV and 4×4, our performance tyre line-up is where we truly outshine the competition.

We don't compromise, and we don't think you, or your customers, should either. With Accelera tyres, your customers won't have to pick between tyre performance, traction, grip, or tread life. Our tyre patterns are designed to maximize handling and traction while increasing tyre life. Each tyre is manufactured using our in-house DeltaMax technology to ensure the highest standard of quality and performance.

PASSENGER


ULTRA-HIGH PERFORMANCE

SPORT UTILITY VEHICLE

4X4

ALL TERRAIN VEHICLE

INSIDE AN ACCELERA TYRE

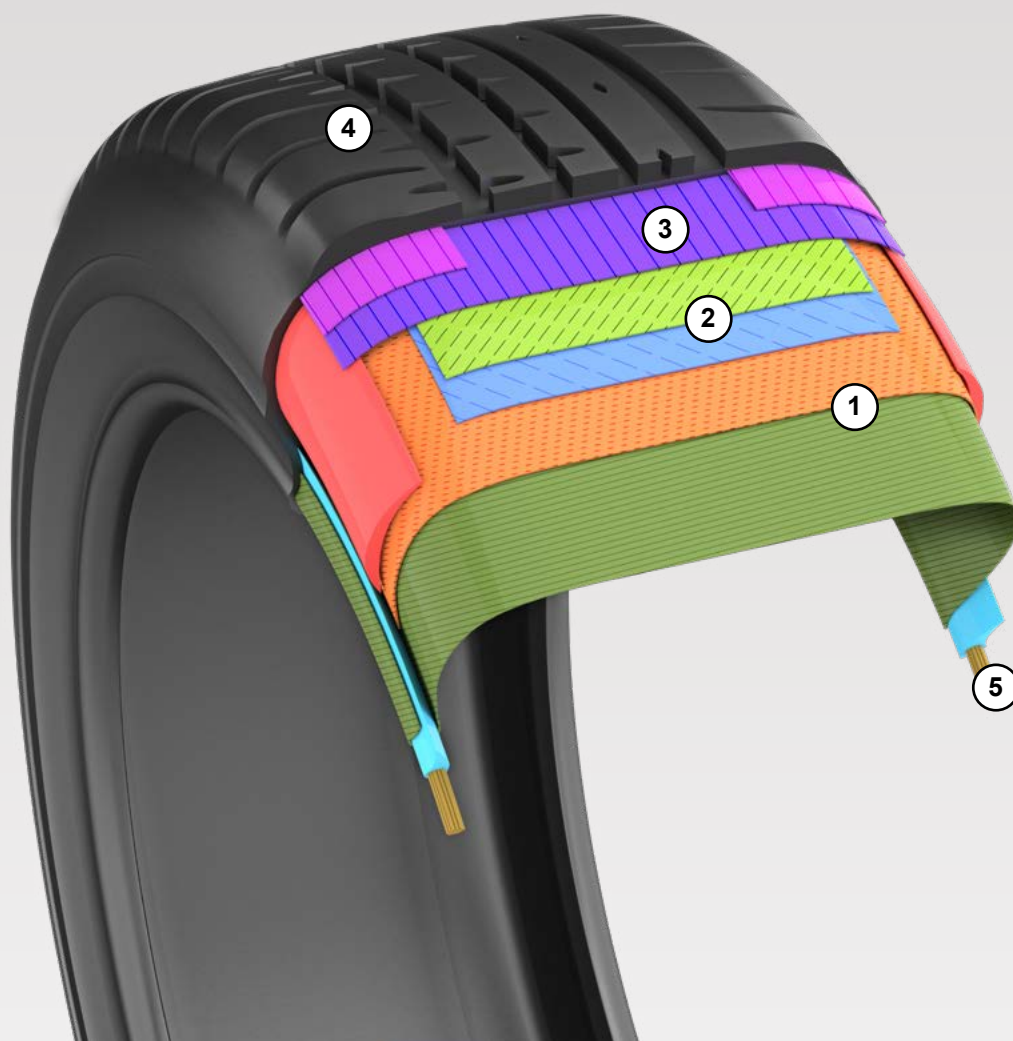

- ① **2 PLIES HIGH TURN UP POLYESTER CASING**
with HMLS (high modulus and low shrinkage) material to allow high stability and uniformity.
- ② **2 HIGH TENSILE STEEL LAYER BELTS**
at optimized angles for additional safety.
- ③ **2 CYCLES SPIRAL JOINTLESS CAP STRIP**
with HMPLS (high melting point with low shrinkage) material to protect steel belts and casing, as well as enhanced stability and prevent deformation of tyre shape.
- ④ **TRIPLE TREAD COMPOUND**
TREAD CAP: Made with silica compound for low noise, rolling resistance and longevity.

WINGS: Sidewall type compound allows bonding between tread and sidewall.

CUSHION: Extra tackiness & low carbon compound creates adhesion between tread and casing while lowering heat buildup.
- ⑤ **JOINTLESS BEAD WIRE**
allows uniformity, less imbalance and reduced chances of breakage.



WHY ACCELERA?

PERFORMANCE-FOCUSED PORTFOLIO »



Accelera is uniquely positioned as a lifestyle brand particularly within the performance segment. However, don't let the line's UHP specialization fool you; it also offers a complete portfolio of tyres across multiple applications.

ENGINEERED WITH DELTAMAX TECHNOLOGY »



Accelera tyres are manufactured using DeltaMax technology to ensure the automation of the production process and uses silica compounds providing immense durability, handling, and traction while increasing tread life.

WAREHOUSE PROGRAM »



We proudly hold an inventory of 150,000+ tyres in UK and distribute all over the country.

ONLINE WEBSHOP »



Accelera customers are given access to our Online webshop Dealer Portal, allowing them to order at any given point.





ECOPLUSH



THREE MAIN RIBS
provide excellent grip and low noise.



MAIN GROOVE AND MINI DIAGONAL GROOVES
enable rapid water evacuation for improved wet handling and traction.



CENTER RIBS WITH ADAPTIVE SIPES
improve rolling and braking, and provide traction while accelerating.



Series	Size	Load Index / Speed Symbol	Max. Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth			
			kgs	psi	inches	mm	mm	mm			
80 Series	165/80R13	83T	487	44	4.5	165	594	7.6	D	C	68dB/B
	175/70R13	82H	475	44	5.0	177	576	7.6	D	C	68dB/B
	185/70R13	86H	530	44	5.5	189	590	7.6	D	C	68dB/B
	165/70R14	81H	462	44	5.0	170	588	7.6	D	C	68dB/B
70 Series	175/70R14	84T	500	44	5.0	177	602	7.6	D	C	68dB/B
	185/70R14	88H	560	44	5.5	189	616	7.6	D	C	68dB/B
	195/70R14	91H	615	44	6.0	201	630	7.6	D	C	68dB/A
	205/70R15	96H	710	44	6.0	209	669	7.8	D	C	68dB/A
65 Series	215/70R15	98H	750	44	6.5	221	683	8.0	D	C	68dB/A
	155/65R14	75H	387	44	4.5	157	558	7.6	D	C	68dB/B
	165/65R14	79T	437	44	5.0	170	570	7.6	D	C	68dB/B
	175/65R14	82H	475	44	5.0	177	584	7.6	D	C	68dB/B
	185/65R14	86H	530	44	5.5	189	596	7.6	D	C	68dB/B
	175/65R15	84H	500	44	5.0	177	609	7.6	D	C	68dB/B
	185/65R15	88H	560	44	5.5	189	621	7.6	D	C	68dB/B
	195/65R15	91H	615	44	6.0	201	635	7.8	D	C	68dB/A
	205/65R15	94V	670	44	6.0	209	647	7.6	D	C	68dB/A
	215/65R15	100H XL	800	44	6.5	221	661	8.0	D	C	68dB/A
60 Series	205/65R16	95H	690	44	6.0	209	672	7.8	D	C	68dB/A
	215/65R16	102V XL	850	44	6.5	221	686	7.8	D	C	68dB/A
	215/65R17	103H XL	775	44	6.5	221	712	8.0	D	C	68dB/A
	185/60R13(WLW)	80V	450	44	5.5	189	552	7.4	D	C	68dB/B
	165/60R14	82H XL	475	44	5.0	170	554	7.2	D	C	68dB/A
	165/60R15	82H XL	475	44	5.0	170	579	7.2	D	C	68dB/A
	175/60R15	81H	462	44	5.0	177	591	7.4	D	C	68dB/B
	185/60R15	84H	500	44	5.5	189	603	7.6	D	C	68dB/B
	195/60R15	88H	560	44	6.0	201	615	7.6	D	C	68dB/A
	205/60R15	91V	615	44	6.0	209	627	7.8	D	C	68dB/A
	225/60R15	96V	710	44	6.5	228	651	8.0	D	C	68dB/A
	195/60R16	89V	580	44	6.0	201	640	7.8	D	C	68dB/A
	205/60R16	96V XL	710	44	6.0	209	652	7.8	D	C	68dB/A
	215/60R16	99V XL	775	44	6.5	221	664	8.0	D	C	68dB/A
	225/60ZR16	102W XL	850	44	6.5	228	676	8.0	D	C	68dB/A

The Accelera Sigma is a dynamic tyre designed to maximize performance. A wide shoulder block, multi-cone lateral grooves, and a v-shaped tread pattern will offer you a confident and stable ride.


SIGMA



WIDER SHOULDER BLOCK
improves cornering stability and noise reduction.



MULTI-CONE LATERAL GROOVE
enables rapid water evacuation to improve contact on wet surfaces and maintain low temperatures on dry surfaces.



V-SHAPED TREAD PATTERN
enables stability on high speeds and clears water rapidly to overcome aquaplaning.

Series	Size	Load Index / Speed Symbol	Max. Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth			
			kgs	psi	inches	mm	mm	mm			
35 Series	215/35ZR18	84W XL	500	44	7.5	218	607	8.2	D	B	71dB/B

The Accelera Gamma tyre is designed for small minivans. Zigzag shoulder blocks, a dynamic U-Block, and a continuous center rib offer a comfortable and economical drive.

GAMMA



UNIQUE ZIGZAG SHOULDER BLOCKS
enable rapid water evacuation for improved wet handling and traction, while also reducing noise levels.



DYNAMIC U-BLOCK
provides excellent grip on both dry and wet surfaces.



CONTINUOUS CENTER RIB
maintains stability and superior handling on straight-line motion.

Series	Size	Load Index / Speed Symbol	Max. Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth			
			kgs	psi	inches	mm	mm	mm			
65 Series	165/65R13	77T	412	44	5.0	170	544	7.6	C	C	70dB/B
60 Series	175/60R13	77H	412	44	5.0	177	540	7.6	C	C	70dB/B
55 Series	165/55R13	70H	335	44	5.0	170	512	7.6	D	C	70dB/B

PHI

The Accelera PHI is a High-Performance Tyre that offers excellent handling and flexibility on different road surfaces. Some key features include a dynamic medium lateral groove and a straight, medium rib. Whether you're looking for a race tyre or a reliable everyday tyre, the PHI is an excellent choice because of its versatility, 400 treadwear rating, and grip and cornering abilities.



DYNAMIC MEDIUM LATERAL GROOVE

provides improved wet handling and rolling resistance.



SHOULDER BLOCK

provides better cornering stability and noise reduction.



STRAIGHT, MEDIUM RIB

improves stability and flexibility on dry road surfaces.



Series	Size	Load Index / Speed Symbol		Max. Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth			
				kgs	psi	inches	mm	mm	mm			
60 Series	235/60ZR16	104W	XL	900	44	7.0	258	695	8.0	C	C	70dB/B
	205/55ZR16	94W	XL	670	44	6.5	214	632	8.0	C	C	70dB/B
55 Series	235/55ZR17	103W	XL	875	44	7.5	245	690	8.0	C	C	70dB/B
	205/50ZR17	93W	XL	650	44	6.5	214	638	7.6	C	C	70dB/B
50 Series	215/50ZR17	95W	XL	690	44	7.0	226	648	8.2	C	C	70dB/B
	225/45ZR17	94W	XL	670	44	7.5	225	634	8.2	C	C	70dB/B
	245/45ZR17	99W	XL	775	44	8.0	243	652	8.0	C	C	70dB/B
	205/45ZR18	90Y	XL	600	44	7.0	206	641	7.6	D	C	70dB/B
45 Series	215/45ZR18	93W	XL	650	44	7.0	213	651	8.2	C	C	70dB/B
	225/45ZR18	95Y	XL	690	44	7.5	225	659	7.8	C	C	70dB/B
	255/45ZR18	103Y	XL	875	44	8.5	255	687	8.2	C	C	70dB/A
	245/45ZR19	102Y	XL	850	44	8.0	243	703	8.0	C	C	70dB/B
	255/45ZR19	104Y	XL	900	44	8.5	255	713	8.0	C	C	70dB/A
	245/45ZR20	103Y	XL	875	44	8.0	243	728	8.2	C	C	70dB/B
	195/40R17	81V	XL	462	44	7.0	200	588	7.6	D	C	70dB/B
	255/40ZR17	98W	XL	750	44	9.0	260	636	8.2	C	C	70dB/A
40 Series	215/40ZR18	89Y	XL	580	44	7.5	218	629	7.8	D	C	70dB/B
	225/40ZR18	92Y	XL	630	44	8.0	230	637	8.2	D	C	70dB/B
	235/40ZR18	95Y	XL	690	44	8.5	241	645	8.0	C	C	70dB/B
	255/40ZR18	99Y	XL	775	44	9.0	260	661	7.8	C	C	70dB/A
	215/40ZR19*	90Y	XL	600	44	7.5	224	648	8.2	D	C	70dB/B
	225/40ZR19	93Y	XL	650	44	8.0	230	663	8.0	C	C	70dB/B
	235/40ZR19	96Y	XL	710	44	8.5	241	671	8.2	C	C	70dB/B
	245/40ZR19	98Y	XL	750	44	8.5	248	679	8.0	C	C	70dB/B
	255/40ZR19	100Y	XL	800	44	9.0	260	687	8.2	C	C	70dB/A
	255/40ZR20	101Y	XL	825	44	9.0	260	712	8.0	C	C	70dB/A
	245/40ZR21	100Y	XL	800	44	8.5	248	729	8.2	C	C	70dB/B
	255/35ZR18	94Y	XL	670	44	9.0	260	635	8.0	C	C	70dB/A
	265/35ZR18	97Y	XL	730	44	9.5	271	643	8.2	C	C	72dB/B
	215/35ZR19	85Y	XL	515	44	7.5	218	633	8.0	D	C	70dB/B
35 Series	225/35ZR19	88Y	XL	560	44	8.0	230	641	8.0	D	C	70dB/B
	235/35ZR19	91Y	XL	615	44	8.5	241	647	8.2	D	C	70dB/B
	245/35ZR19	93Y	XL	650	44	8.5	248	655	8.0	C	C	70dB/B
	265/35ZR19	98Y	XL	750	44	9.5	271	669	8.2	C	C	72dB/B
	225/35ZR20	93Y	XL	650	44	8.0	230	666	7.8	C	C	70dB/B
	235/35ZR20	92Y	XL	630	44	8.5	241	672	8.2	D	C	70dB/B
	255/35ZR21	98Y	XL	750	44	9.0	259	711	8.0	C	C	70dB/A
	245/35ZR22	97Y	XL	730	44	8.5	248	731	8.2	C	C	70dB/B

Series	Size	Load Index / Speed Symbol	Max. Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth			
			kgs	psi	inches	mm	mm	mm			
30 Series	255/30ZR19	91Y XL	615	44	9.0	260	637	8.2	D	C	72dB/B
	265/30ZR19	93Y XL	650	44	9.5	271	643	8.2	C	C	72dB/B
	215/30ZR20*	82W	475	44	7.5	235	633	8.0	D	C	70dB/B
	225/30ZR20	85Y XL	515	50	8.0	230	644	8.2	D	C	70dB/B
	235/30ZR20	88Y XL	560	44	8.5	241	650	8.2	D	C	70dB/B
	245/30ZR20	93Y XL	650	44	8.5	248	656	8.0	C	C	70dB/B
	255/30ZR20	92Y XL	630	44	9.0	260	662	8.0	D	C	72dB/B
	265/30ZR20	94Y XL	670	44	9.5	267	664	8.2	C	C	72dB/B
	235/30ZR21	89Y XL	580	44	8.5	240	674	8.2	D	C	70dB/B
	255/30ZR21	95W XL	690	44	9.0	260	687	8.0	C	C	72dB/B
25 Series	255/30ZR22	95Y XL	690	44	9.0	260	713	8.0	C	C	72dB/B
	245/25ZR21	86Y XL	530	44	8.5	252	656	8.0	D	C	70dB/B

* Newly added sizes

The Accelera PHI R is just like our PHI Tyre, but with an updated tread design. A High-Performance Tyre that offers excellent handling and stability, the PHI-R features a triple rib design and additional sipes to improve steering ability and reduce noise. The versatility of the Tyre compound makes the Accelera PHI R an ideal choice for drivers looking for a solid everyday Tyre or a Tyre they can learn to race on.

THE MODERN PHI TYRE

PHI-R



TRIPLE RIB
improves high speed stability and better steering response.



SHOULDER BLOCKS
provide improved cornering and maneuvering stability.



ADDITIONAL SIPES
allow pattern noise reduction.

Series	Size	Load Index / Speed Symbol	Max. Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth			
			kgs	psi	inches	mm	mm	mm			
60 Series	205/60R14	88H	560	44	6.0	209	602	7.8	D	C	70dB/B
	175/55R15	77T	412	44	5.5	182	573	7.6	D	C	70dB/B
	185/55R15	86V XL	530	44	6.0	194	585	7.6	D	C	70dB/B
	195/55R15	89V XL	580	44	6.0	201	595	7.6	D	C	70dB/B
	205/55R15	92V XL	630	44	6.5	215	598	7.6	D	C	70dB/B
	185/55R16	83V	487	44	6.0	195	603	7.6	D	C	70dB/B
55 Series	195/55R16	91V XL	615	44	6.0	201	620	7.6	D	C	70dB/B
	215/55ZR16	97W XL	730	44	7.0	226	642	7.8	C	C	70dB/B
	225/55ZR16	99W XL	775	44	7.0	235	645	7.8	C	C	70dB/B
	205/55R17	95V XL	690	44	6.5	214	658	7.6	C	C	70dB/B
	215/55ZR17	98W XL	750	44	7.0	226	668	7.8	C	C	70dB/B
	225/55ZR17	101W XL	825	44	7.0	233	680	7.8	C	C	70dB/B
	245/55ZR17	102W	850	44	7.5	253	702	8.0	C	C	70dB/B
	175/50R15	75H	387	44	5.5	182	557	7.6	D	C	70dB/B
50 Series	195/50R15	82V	475	44	6.0	201	577	7.6	D	C	70dB/B
	185/50R16	81V	462	44	6.0	194	592	7.6	D	C	70dB/B
	195/50R16	84V	500	44	6.0	201	602	7.6	D	C	70dB/B
	205/50ZR15	89W XL	580	44	6.5	214	587	7.6	D	C	70dB/B
	205/50ZR16	91W XL	615	44	6.5	214	612	7.6	D	C	70dB/B

Series	Size	Load Index / Speed Symbol		Max. Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth			
				kgs	psi	inches	mm	mm	mm			
50 Series	215/50ZR18	97W	XL	730	44	7.0	226	673	7.8	C	C	70dB/B
	225/50ZR16	96W	XL	710	44	7.0	233	632	7.8	C	C	70dB/B
	225/50ZR17	98W	XL	750	44	7.0	233	658	8.2	C	C	70dB/B
	235/50ZR17	100Y	XL	800	44	7.5	245	668	8.2	C	C	70dB/B
	225/50ZR18	99W	XL	775	44	7.0	233	683	7.8	C	C	70dB/B
	235/50ZR18	101Y	XL	825	44	7.5	245	693	8.0	C	C	70dB/B
	245/50ZR17	99W		775	44	7.5	254	678	7.9	C	C	70dB/B
	245/50ZR18	104W	XL	900	44	7.5	253	703	8.0	C	C	70dB/B
45 Series	195/45R15	78V		425	44	6.5	195	557	7.6	D	C	70dB/B
	195/45ZR16	84W	XL	500	44	6.5	195	582	7.2	D	C	70dB/B
	205/45ZR16	87W	XL	545	44	7.0	206	590	7.2	D	C	70dB/B
	215/45ZR16	90W	XL	600	44	7.0	213	600	7.8	D	C	70dB/B
	205/45ZR17	88W	XL	560	44	7.0	206	616	7.2	D	C	70dB/B
	215/45ZR17	91W	XL	615	44	7.0	213	626	7.8	D	C	70dB/B
	235/45ZR17	97W	XL	730	44	8.0	236	644	7.8	C	C	70dB/B
	235/45ZR18	98Y	XL	750	44	8.0	236	669	8.2	C	C	70dB/B
40 Series	245/45ZR18	100Y	XL	800	44	8.0	243	677	8.2	C	C	70dB/B
	225/45ZR19	96W	XL	710	44	7.5	225	685	7.8	C	C	70dB/B
	235/45ZR19	99Y	XL	775	44	8.0	236	695	8.2	C	C	70dB/B
	205/40ZR16	83W	XL	487	44	7.5	212	570	7.6	D	C	70dB/B
	165/40R17	72V	XL	355	44	6.0	170	564	7.4	D	C	70dB/B
	205/40ZR17	84W	XL	500	44	7.5	212	596	7.6	D	C	70dB/B
	215/40ZR17	87W	XL	545	44	7.5	218	604	7.8	D	C	70dB/B
	245/40ZR17	95W	XL	690	44	8.5	248	628	8.0	C	C	70dB/B
35 Series	205/40ZR18	86Y	XL	530	44	7.5	212	621	7.2	D	C	70dB/B
	245/40ZR18	97Y	XL	730	44	8.5	248	653	8.2	C	C	70dB/B
	225/40ZR20	101W	XL	825	44	8.0	230	688	7.8	C	C	70dB/B
	245/40ZR20	99Y	XL	775	44	8.5	248	704	8.2	C	C	70dB/B
	185/35R17	82V	XL	475	44	6.5	188	554	7.8	D	C	70dB/B
	225/35ZR17	86Y	XL	530	44	8.0	230	590	7.8	D	C	70dB/B
	225/35ZR18	87Y	XL	545	44	8.0	230	615	7.8	D	C	70dB/B
	245/35ZR18	92Y	XL	630	44	8.5	248	629	8.0	D	C	70dB/B
30 Series	255/35ZR19	96Y	XL	710	44	9.0	260	661	8.2	C	C	70dB/A
	245/35ZR20	95Y	XL	690	44	8.5	248	680	8.0	C	C	70dB/B
	255/35ZR20	97Y	XL	730	44	9.0	260	686	8.2	C	C	70dB/A
	245/35ZR21	96Y	XL	710	44	8.5	248	705	8.2	C	C	70dB/B
25 Series	245/30ZR21	91Y	XL	615	44	8.5	248	681	8.0	D	C	70dB/B
	255/25ZR21	88Y	XL	560	44	9.0	262	661	8.2	D	C	72dB/B

The Accelera PHI 2 is just like our PHI Tyre, but for wider fitment vehicles. A High-Performance Tyre that offers excellent handling and stability, the PHI 2 features a dynamic medium lateral groove and a straight, dry rib. The Accelera PHI 2 is the ideal choice for drivers looking for a solid everyday tyre.

PHI-2



DYNAMIC MEDIUM LATERAL GROOVE

provides improved wet handling and rolling resistance.



SHOULDER BLOCK

designed to allow better cornering stability and reduced noise.



STRAIGHT DRY RIB

ensures stability and flexibility on the road.

Series	Size	Load Index / Speed Symbol		Max. Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth			
				kgs	psi	inches	mm	mm	mm			
40 Series	275/40ZR18	103Y	XL	875	44	9.5	278	677	8.0	C	C	72dB/B
	275/40ZR19	105Y	XL	925	44	9.5	278	703	8.0	C	C	72dB/B
35 Series	275/35ZR18	99Y	XL	775	44	9.5	278	649	8.0	C	C	72dB/B
	275/35ZR19	100Y	XL	800	44	9.5	278	675	8.0	C	C	72dB/B
	285/35ZR19	103Y	XL	875	44	10.0	290	683	8.0	C	C	72dB/B
	275/35ZR20	102Y	XL	850	44	9.5	278	700	8.0	C	C	72dB/B
30 Series	275/30ZR19	96Y	XL	710	44	9.5	278	649	8.0	C	C	72dB/B
	285/30ZR19	98Y	XL	750	44	10.0	290	655	8.2	C	C	72dB/B
	275/30ZR20	97Y	XL	730	44	9.5	278	674	8.0	C	C	72dB/B
	285/30ZR20	99Y	XL	775	44	10.0	290	680	8.0	C	C	72dB/B
	295/30ZR20	101Y	XL	825	44	10.5	301	686	8.0	C	C	72dB/A
	275/30ZR21	98Y	XL	750	44	9.5	278	699	8.0	C	C	72dB/B
25 Series	275/25ZR20	91Y	XL	615	44	10.0	283	646	8.0	D	C	72dB/B
	285/25ZR20	93Y	XL	650	44	10.5	295	650	8.2	C	C	72dB/B
	295/25ZR21	96Y	XL	710	44	10.5	301	681	8.0	C	C	72dB/A

Upcoming Sizes

Size	Load Index / Speed Symbol	
295/30ZR19	100Y	XL
305/30ZR20	103Y	XL

IOTA ST68

The Iota ST68 is a modern spin on the original Iota tyre designed for SUVs. Engineered for a comfortable ride and longer tyre life, this SUV tyre is an excellent choice for year-round performance. Some key features include three interlocked block lanes for quick steering response and exclamation sipes to maintain traction during wet conditions.



MAIN GROOVES

clear water from surface area in contact with the road to prevent aquaplaning.



THREE INTERLOCKED BLOCK LANES

provide directional stability and quick steering response.



EXCLAMATION SIPES

break thin layering of water to prevent aquaplaning and maintain traction in wet weather conditions.



Series	Size	Load Index / Speed Symbol		Max. Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth			
				kgs	psi	inches	mm	mm	mm			
70 Series	265/70R16	116H	XL	1250	51	8.0	280	766	8.2	C	C	68dB/A
	235/65R17	108V	XL	1000	51	7.0	250	726	8.2	C	C	68dB/A
65 Series	265/65R17	116H	XL	1250	51	8.0	272	776	8.2	C	C	68dB/A
	235/65ZR18	106W		950	51	7.0	253	758	7.8	C	C	68dB/A
60 Series	255/65R18	111H		1090	51	7.5	272	778	8.0	C	C	68dB/A
	215/60R17	100V	XL	800	51	6.5	227	686	8.0	C	C	68dB/A
	225/60R17	99H		775	51	6.5	239	694	7.8	C	C	68dB/A
	235/60R17	102H		850	51	7.0	255	708	7.8	C	C	68dB/A
	255/60R17	110V	XL	1060	51	7.5	264	726	8.6	C	C	68dB/A
	235/60R18	107V	XL	975	51	7.0	240	739	7.9	C	C	68dB/A
	245/60R18	105V		925	51	7.0	258	742	8.4	C	C	68dB/A
	255/60R18	112V	XL	1120	51	7.5	272	752	8.4	C	C	68dB/A
	265/60R18	114V	XL	1180	51	8.0	272	775	8.4	C	C	68dB/A
	255/60R19	109H		1030	51	7.5	269	778	8.0	C	C	68dB/A
55 Series	275/60R20	115V		1215	51	8.0	279	838	8.4	C	C	68dB/A
	215/55R18	99V	XL	775	51	7.0	226	693	8.0	C	C	68dB/A
	225/55R18	98V		750	51	7.0	233	705	7.8	C	C	68dB/A
	235/55R18	104V	XL	900	51	7.5	245	715	7.8	C	C	68dB/A
	255/55R18	109V	XL	1030	51	8.0	275	725	8.2	C	C	68dB/A
	225/55ZR19	99Y		775	51	7.0	233	731	7.8	C	C	68dB/A
	235/55R19	105V		925	51	7.5	244	742	7.9	C	C	68dB/A
	245/55ZR19	103Y		875	51	7.5	253	753	8.2	C	C	68dB/A
	255/55R19	111V	XL	1090	51	8.0	265	763	8.4	C	C	68dB/A
	265/55R19	109V		1030	51	8.5	277	775	8.4	C	C	68dB/A
50 Series	235/55R20	102V		850	51	7.5	245	766	7.8	C	C	68dB/A
	255/55ZR20	110W	XL	1060	51	8.0	265	788	8.0	C	C	68dB/A
	275/55R20	117V	XL	1285	51	8.5	284	810	8.2	C	C	68dB/A
	235/50R19	103V	XL	875	51	7.5	245	719	8.0	C	C	68dB/A
	255/50ZR19	107W	XL	975	51	8.0	265	739	8.0	C	C	68dB/A
	265/50ZR19	110Y	XL	1060	51	8.5	277	749	8.0	C	C	68dB/A
	235/50R20	104V	XL	900	51	7.5	245	744	7.8	C	C	68dB/A
	245/50ZR20	102Y		850	51	7.5	253	754	8.2	C	C	68dB/A
	255/50ZR20	109W	XL	1030	51	8.0	265	764	8.4	C	C	68dB/A
	265/50R20	111V	XL	1090	51	8.5	277	774	8.4	C	C	68dB/A
50 Series	285/50ZR20	116W	XL	1250	51	9.0	297	794	8.2	C	C	68dB/A
	255/50ZR21	106W		950	51	8.0	265	789	8.0	C	C	68dB/A
	275/50R21	113V	XL	1150	51	8.5	284	809	8.2	C	C	68dB/A
	275/50R22	111V		1090	51	8.5	284	835	8.4	C	C	68dB/A


Series	Size	Load Index / Speed Symbol	Max. Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth			
			kgs	psi	inches	mm	mm	mm			
45 Series	275/45ZR19	108W XL	1000	51	9.0	273	731	8.2	C	C	68dB/A
	285/45ZR19	111W XL	1090	51	9.5	285	739	8.4	C	C	68dB/A
	235/45ZR20	100W XL	800	51	8.0	236	720	8.0	C	C	68dB/A
	255/45ZR20	105W XL	925	51	8.5	255	738	8.0	C	C	68dB/A
	265/45ZR20	108Y XL	1000	51	9.0	266	746	8.0	C	C	68dB/A
	275/45ZR20	110Y XL	1060	51	9.0	273	756	8.6	C	C	68dB/A
	265/45ZR21	108W XL	1000	51	9.0	266	771	8.4	C	C	68dB/A
	275/45ZR21	110W XL	1060	51	9.0	273	781	8.2	C	C	68dB/A
	285/45ZR21	109W	1030	51	9.5	285	789	8.2	C	C	68dB/A
	275/45ZR22	112W XL	1120	51	9.0	273	807	8.2	C	C	68dB/A
	285/45R22	114V XL	1180	51	9.5	285	815	8.2	C	C	68dB/A
	305/45ZR22	118W XL	1320	51	10.0	303	833	8.0	C	C	72dB/A
40 Series	265/40ZR20	104Y XL	900	51	9.5	271	720	8.2	C	C	68dB/A
	275/40ZR20	106Y XL	950	51	9.5	278	728	8.2	C	C	68dB/A
	295/40ZR20	110Y XL	1060	51	10.5	301	744	8.0	C	C	72dB/A
	255/40ZR21	102W XL	850	51	9.0	260	737	8.0	C	C	68dB/A
	265/40ZR21	105Y XL	925	51	9.5	271	745	8.0	C	C	68dB/A
	275/40ZR21	107Y XL	975	51	9.5	278	753	8.6	C	C	68dB/A
	285/40ZR21	109W XL	1030	51	10.0	290	761	8.2	C	C	68dB/A
	315/40ZR21	115W XL	1215	51	11.0	320	785	8.2	C	C	72dB/A
	265/40ZR22	106Y XL	950	51	9.5	271	771	8.4	C	C	68dB/A
	275/40ZR22	108Y XL	1000	51	9.5	278	779	8.2	C	C	68dB/A
	285/40ZR22	110Y XL	1060	51	10.0	290	787	8.2	C	C	68dB/A
	305/40ZR22	114W XL	1180	51	11.0	313	803	8.2	C	C	72dB/A
35 Series	285/40ZR23	111Y XL	1090	51	10.0	289	804	8.2	C	C	68dB/A
	315/35ZR20	110W XL	1060	51	11.0	320	728	8.2	C	C	72dB/A
	265/35ZR21*	101Y XL	825	51	9.5	271	710	8.2	C	C	68dB/A
	275/35ZR21	103Y XL	875	51	9.5	278	725	8.2	C	C	68dB/A
	285/35ZR21	105Y XL	925	51	10.0	290	733	8.2	C	C	68dB/A
	295/35ZR21	107Y XL	975	51	10.5	301	739	8.0	C	C	68dB/A
	315/35ZR21	111W XL	1090	51	11.0	320	753	8.0	C	C	72dB/A
	265/35R22	102V XL	850	51	9.5	271	745	8.0	C	C	68dB/A
	255/35ZR22	99W XL	775	51	9.0	260	737	8.0	C	C	68dB/A
	275/35ZR22	104Y XL	900	51	9.5	278	751	8.6	C	C	68dB/A
	285/35ZR22	106W XL	950	51	10.0	290	759	8.2	C	C	68dB/A
	285/35ZR23	107Y XL	975	51	10.0	290	784	8.2	C	C	68dB/A
	305/35ZR23	111Y XL	1090	51	11.0	316	790	8.2	C	C	72dB/A
30 Series	325/35ZR23*	111Y	1090	51	11.5	331	804	8.0	C	C	72dB/A
	295/35ZR24	110W XL	1060	51	10.5	301	816	8.2	C	C	72dB/A
	305/35ZR24	112W XL	1120	51	11.0	313	824	8.2	C	C	72dB/A
	315/30ZR21	105W XL	925	51	11.0	320	723	8.2	C	C	72dB/A
	325/30ZR21	108Y XL	1000	51	11.5	331	729	8.0	C	C	72dB/A
	235/30ZR22	90W XL	600	51	8.5	241	701	8.0	C	C	68dB/A
	245/30ZR22	92W XL	630	51	8.5	248	707	8.2	C	C	68dB/A
	255/30ZR22	95W XL	690	51	9.0	260	713	8.0	C	C	68dB/A
	295/30ZR22	103Y XL	875	51	10.5	301	737	8.0	C	C	72dB/A
	315/30ZR22	107W XL	975	51	11.0	320	749	8.0	C	C	72dB/A
25 Series	285/25ZR22*	95W XL	690	51	10.5	303	699	8.0	C	C	68dB/A

* Newly added sizes

Upcoming Sizes		
Size	Load Index / Speed Symbol	
235/50 R21	101V	
235/40 R21	98V	XL
285/35 R20	100Y	
265/30ZR22	97W	XL


OMIKRON HT

The Omikron HT is a highway tyre for SUV and light truck applications. Some key features are three semi ribs with interlocked blocks, four wide grooves, and a wide tread. The silica compound and tyre design ensure a smooth, stable, and quiet ride. The Accelera Omikron HT is also available in LT-metric commercial application tyre sizes.



THREE SEMI RIBS WITH INTERLOCKED BLOCKS

maintain stability on the highway, offer driving comfort and a quiet ride.

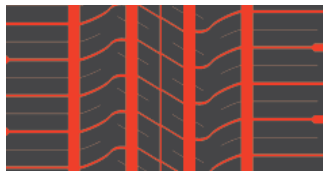

FOUR WIDE GROOVES

drain water rapidly to prevent aquaplaning and enhance performance on wet surfaces.



WIDE TREAD WITH SILICA COMPOUND

improves traction. Particularly effective in cold, wet environments.



P METRIC										
Series	Size	Load Index / Speed Symbol	Max. Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth	C	C
			kgs	psi	inches	mm	mm	mm		
75 Series	265/75R16	116T	1250	51	7.5	267	804	10.0	C	C
	215/70R16	100H	800	51	6.5	221	708	8.5	D	C
	235/70R16	106H	950	51	7.0	240	736	8.5	D	C
70 Series	245/70R16	107H	975	51	7.0	248	750	8.5	C	C
	255/70R16	111T	1090	51	7.5	260	764	9.3	C	C
	245/70R17	110T	1060	51	7.0	248	776	8.5	C	C
	265/70R17	115H	1215	51	8.0	272	804	10.0	C	C
	225/65R17	102H	850	51	6.5	228	724	8.2	D	C
65 Series	235/65R17	104H	900	51	7.0	240	738	8.5	D	C
	245/65R17	107T	975	51	7.0	248	750	8.5	C	C
60 Series	225/60R18	104H XL	900	51	6.5	230	715	8.0	D	C

LT METRIC												
Series	Size	Load Index / Speed Symbol	PR	Max Load (Single)	Max Load (Dual)	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth	D	A
				kgs	kgs	psi	inches	mm	mm	mm		
85 Series	LT 235/85R16	120/116R	10	1400	1250	80	6.5	235	806	13.0	D	A
80 Series	LT 235/80R17	120/117R	10	1400	1285	80	6.5	235	808	13.0	D	A
75 Series	LT 245/75R16	120/116R	10	1400	1250	80	7.0	248	774	13.0	D	A
70 Series	LT 265/70R17	121/118S	10	1450	1320	80	8.0	272	804	13.0	D	A

The Omikron AT tyre is designed to maneuver all terrain conditions. Some key features include interlocked and intermediate blocks, two main grooves with notches, and block stepped edges. The Accelera Omikron AT gives you an edge without compromising on comfort, making it a perfect choice for an all-terrain drive. The Accelera Omikron AT is also available in LT-metric commercial application tyre sizes.

OMIKRON AT



INTERLOCKED CENTER AND INTERMEDIATE BLOCKS
combined with two sipes assure driving comfort on the highway.



BLOCK STEPPED EDGES AND Z-SHAPED SIPES
enhance traction on off-road surfaces, provide excellent cornering, and prevent irregular wear.



TWO MAIN GROOVES WITH NOTCHES
effectively clear water from area of footprint to eliminate hydroplaning and maintain wet braking.

											P METRIC		
Series	Size	Load Index / Speed Symbol		Max. Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth				
				kgs	psi	inches	mm	mm	mm				
60 Series	285/60R18 (BSW / OWL)	116H		1250	51	8.5	300	792	10.2	D	C		73dB/B
55 Series	265/55R20* (BSW/OWL)	113V XL		1150	51	8.5	280	792	9.5	D	C		73dB/B
50 Series	265/50R20 (BSW / OWL)	111S XL		1090	51	8.5	277	774	9.5	D	C		73dB/B
	285/50R20 (BSW / OWL / OOL)	112H		1120	51	9.0	297	794	10.5	D	C		73dB/B
40 Series	285/40R22	110H XL		1060	51	10.0	290	787	10.5	D	C		75dB/B

* Newly added size

											LT METRIC		
Series	Size	Load Index / Speed Symbol	PR	Max Load (Single)	Max Load (Dual)	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth			
				kgs	kgs	psi	inches	mm	mm	mm			
85 Series	LT 235/85R16 (BSW / OWL)	120/116Q	10	1400	1250	80	6.5	236	805	10.3	C	A	72dB/B
80 Series	LT 235/80R17 (BSW / OWL)	120/117R	10	1400	1285	80	6.5	235	808	12.7	C	A	72dB/B
75 Series	LT 235/75R15 (BSW / OWL)	116/113Q	10	1250	1150	80	6.5	235	733	9.5	D	A	72dB/B
	LT 245/75R16 (BSW / OWL)	120/116Q	10	1400	1250	80	7.0	249	775	11.1	C	A	72dB/B
	LT 245/75R17 (BSW / OWL)	121/118R	10	1450	1320	80	7.0	248	800	13.0	C	A	72dB/B
	LT 285/75R17 (BSW / OWL)	121/118S	10	1450	1320	80	8.0	286	860	13.5	C	A	72dB/B
	LT 235/70R15 (BSW / OWL)	114/110Q	10	1180	1060	80	7.0	240	711	9.5	D	A	72dB/B
70 Series	LT 265/70R17 (BSW / OWL)	121/118Q	10	1450	1320	80	8.0	272	804	11.0	C	A	72dB/B
	LT 285/70R17 (BSW / OWL)	121/118R	10	1450	1320	80	8.5	292	832	13.5	C	A	72dB/B

OMIKRON CT

Forge a new path with the Accelera Omikron CT. This all-terrain (AT) tyre is designed to take you anywhere your vehicle can go. Its ultra-wide cross-section is paired with its clasp-shaped tread blocking system that works to provide you with unparalleled grip in any off or on-road environment. This tyre's wide, z-shaped tread grooves are specially designed to maximize mudflow to give you the biting edge you need to pull through the slickest of situations.



ATTRACTIVE TREAD WITH WIDE CROSS SECTION
ensures a longer service lifespan and provides superior traction on all terrains while giving an aggressive look and feel.



MULTIPLE EDGE BLOCKS
prevent slips on rocks while minimizing noise and ensuring a safe and comfortable ride.



DYNAMIC WIDE GROOVES
maximize mud flow increasing traction in mud and snow conditions.



Series	Size	Load Index / Speed Symbol	PR	POR MARKED			LT METRIC			
				Max Load (Single)	Max Load (Dual)	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
				kgs	kgs	psi	inches	mm	mm	mm
70 Series	LT 225/70R16	102/99Q	6	850	775	50	6.5	228	722	10.0
65 Series	LT 225/65R17	107/103Q	8	975	875	65	6.5	223	722	13.0
	LT 275/65R18	119/116Q	8	1360	1250	65	8.0	297	810	12.0
55 Series	LT 275/55R20	115/112P	8	1215	1120	65	8.5	284	810	12.0

The Accelera MT-01 is an aggressive mud-terrain tyre that fits all your off-road needs. Unique tread blocks, a deep tread design, and an open scalloped hump will keep you “grounded” while you’re off-roads. Don’t let the aggressive pattern fool you—the Accelera MT-01 is engineered to reduce noise levels and maintain smoothness, no matter how tough the terrain.

MT-01



UNIQUE TREAD BLOCKS WITH WIDE CENTER SIPIES
increase off-road traction.



OPEN SCALLOPED HUMP TREAD
offer superior tracking on off-road surfaces; situated between block slots to drain water rapidly, as well as throw away trapped rocks, mud and other foreign material.



DEEP TREAD DESIGN
allows strong hold on ground surfaces and maintains grip on loose surfaces.

P METRIC								
Series	Size	Load Index / Speed Symbol	Max. Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
			kgs	psi	inches	mm	mm	mm
60 Series	265/60R18 (BSW / OWL)	110Q	1060	51	8.0	275	773	15.0
50 Series	265/50R20 (BSW / OWL)	111Q	1090	51	8.5	275	773	15.0
45 Series	275/45R22	112P XL	1120	51	9.0	276	810	15.0

							POR MARKED		LT METRIC	
Series	Size	Load Index / Speed Symbol	PR	Max Load (Single)	Max Load (Dual)	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
				kgs	kgs	psi	inches	mm	mm	mm
Flotation	LT 30X9.50R15 (BSW / OWL)	104Q	6	900	-	51	7.5	245	747	15.0
	LT 31X10.50R15 (BSW / OWL / OOL)	109Q	6	1030	-	51	8.5	274	775	13.7
	LT 33X12.50R15 (BSW / OWL)	108Q	6	1000	-	36	10.0	318	826	16.0
	LT 33X12.50R20 (BSW / OWL)	114Q	10	1180	-	65	10.0	320	826	15.5
	LT 35X12.50R17 (BSW / OWL)	125Q	10	1650	-	65	10.0	318	877	16.5
	LT 35X12.50R18 (BSW / OWL)	123Q	10	1550	-	65	10.0	318	877	16.5
	LT 35X12.50R20 (BSW / OWL)	121Q	10	1450	-	65	10.0	308	873	16.5
	LT 37X13.50R20	127K	10	1750	-	65	11.0	345	927	15.9
85 Series	LT 185/85R16 (BSW / OWL)	105/103L	8	925	875	51	5.0	190	716	13.7
	LT 235/85R16 (BSW / OWL)	120/116Q	10	1400	1250	80	6.5	243	800	13.7
80 Series	LT 195/80R15	107/105L	8	975	925	65	5.5	202	688	13.7
	LT 235/80R17 (BSW / OWL)	120/117Q	10	1400	1285	80	6.5	243	800	13.7
75 Series	LT 235/75R15 (BSW / OWL)	104/101Q	6	900	825	51	6.5	235	733	13.7
	LT 255/75R17	111/108Q	6	1090	1000	65	7.0	263	805	14.7
	LT 285/75R16 (BSW / OWL)	126/123Q	10	1700	1550	80	8.0	300	829	15.0
	LT 315/75R16 (BSW / OWL)	127/124Q	10	1750	1600	65	8.5	320	875	16.0
70 Series	LT 235/70R16	104/101Q	6	900	825	50	7.0	238	727	13.7
	LT 255/70R18	117/114Q	8	1285	1180	65	7.5	263	805	14.7
	LT 285/70R17 (BSW / OWL)	121/118Q	10	1450	1320	80	8.5	296	829	15.0
	LT 315/70R17 (BSW / OWL)	121/118Q	10	1450	1320	65	9.5	316	875	16.0
65 Series	LT 265/65R17 (BSW / OWL)	120/117Q	10	1400	1285	80	8.0	278	773	15.0
	LT 285/65R18 (BSW / OWL)	125/122Q	10	1650	1500	80	8.5	300	829	15.0
55 Series	LT 275/55R20 (BSW / OWL)	115/112P	8	1215	1120	65	8.5	284	810	15.0

Upcoming Sizes		
Size	Load Index / Speed Symbol	PR
LT 165/80R13 (BSW/OWL)	94/93Q	8
LT 28X8.50 R15 (BSW/OWL)	102Q	6

ULTRA-3

The Accelera Ultra-3 is a commercial tyre designed for light commercial use. Key features include two wide grooves, twin ribs and circumferential sipes for better traction, along with notched shoulder blocks for stability. The Accelera Ultra-3 is a tough and durable companion you can rely on for your business needs.



TWO WIDE GROOVES

combined with a smaller center groove rapidly clear water to prevent hydroplaning.



TWIN RIBS AND CIRCUMFERENTIAL SIPES

provide on and off-road traction in dry and wet conditions while enhancing driving comfort.



NOTCHED SHOULDER BLOCKS

offer excellent cornering stability.



Series	Size	Load Index / Speed Symbol	PR	Max Load (Single)	Max Load (Dual)	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth			
				kgs	kgs	psi	inches	mm	mm	mm			
75 Series	195/75R16C	107/105S	8	975	925	69	5.5	196	698	9.5	C	A	70dB/B
70 Series	195/70R15C	104/102R	8	900	850	65	6.0	201	655	9.5	C	A	70dB/B
65 Series	235/65R16C	121/119R	10	1450	1360	65	7.0	239	711	10.0	C	A	71dB/B
	185R14C	102/100S	8	850	800	65	5.5	188	650	9.7	C	A	70dB/B
LTRC	195R14C (BSW/WLW)	106/104S	8	950	900	65	5.5	198	666	9.5	C	A	70dB/B
	195R15C	106/104R	8	950	900	65	5.5	198	690	10.0	C	A	70dB/B

EXTRA HEAVY-DUTY FOR COMMERCIAL VANS

ULTRA-5

The Accelera Ultra-5 is a commercial tyre designed for light commercial use. Key features include double semi block ribs with unique sipes, three main grooves for quicker water evacuation, along with tough shoulder blocks provide good traction.



DOUBLE SEMI BLOCK RIBS WITH UNIQUE SIPES

Provides handling stability and good traction as well as braking.



TOUGH SHOULDER BLOCKS

Provides good traction when cornering to prevent understeer or oversteer.



THREE MAIN GROOVES


Expel water quickly to prevent hydroplaning.



Series	Size	Load Index / Speed Symbol	PR	Max Load (Single)	Max Load (Dual)	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth			
				kgs	kgs	psi	inches	mm	mm	mm			
75 Series	205/75R14C (WLW)	109/107S	8	1030	975	69	5.5	203	664	9.5	D	B	70dB/B
LTRC	175R13C	97/95R	8	730	690	65	5.0	178	612	8.5	D	B	70dB/B

The X-Grip 4S is Accelera's first all-season tyre. Engineered with a rubber compound that is a fusion between summer and winter tyres, this versatile tyre can be used during UK winter conditions, or all-year round. Some key features include a rigid shoulder block, high-density sipes, and a wider groove. The Accelera X-Grip 4S is a great choice for climates with all four seasons so you don't have to worry about changing your tyres.


X-GRIP 4S

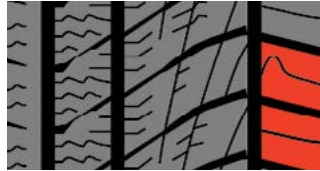

RIGID SHOULDER BLOCK
provides excellent cornering stability.



TWO SEMI BLOCK RIBS WITH HIGH DENSITY SIPES
provide superior grip and braking on snow and ice.

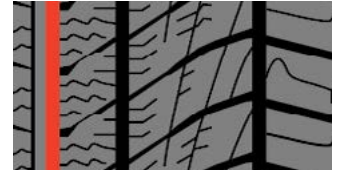

WIDE GROOVE
drains water effectively to protect against aquaplaning.

Series	Size	Load Index / Speed Symbol	Max. Load kgs	Max. Inflation Pressure psi	Rim Width inches	Section Width mm	Overall Diameter mm	Tread Depth mm	C	C	ABC
65 Series	175/65R14	86H XL	530	44	5.0	177	584	8.3	C	C	71dB/B
60 Series	195/60R15	92V XL	630	44	6.0	201	615	8.3	C	C	71dB/B
	205/60R16	96H XL	710	44	6.0	209	652	8.3	C	C	71dB/B
55 Series	185/55R15	86H XL	530	44	6.0	194	585	8.4	C	C	71dB/B
	195/55R15	89V XL	580	44	6.0	201	595	8.3	C	C	71dB/B
	195/55R16	91V XL	615	44	6.0	201	620	8.3	C	C	71dB/B
	205/55R16	94V XL	670	44	6.5	214	632	8.3	C	C	71dB/B
50 Series	225/50ZR17	98W XL	750	44	7.0	233	658	8.5	C	C	71dB/B
	215/45ZR16	90W XL	600	44	7.0	213	600	8.3	C	C	71dB/B
45 Series	225/45ZR17	94W XL	670	44	7.5	225	634	8.5	C	C	71dB/B
	235/45R18	98V XL	750	44	8.0	236	669	8.5	C	C	71dB/B
	225/40ZR18	92Y XL	630	44	8.0	230	637	8.5	C	C	71dB/B
40 Series	245/40R18	97V XL	730	44	8.5	248	653	8.5	C	C	71dB/B
	235/40ZR19	96Y XL	710	44	8.5	241	671	8.5	C	C	71dB/B
35 Series	285/35ZR22	106W XL	950	44	10.0	290	759	8.7	C	C	72dB/A

UPCOMING PATTERN

IOTA EVT

Upcoming Sizes		
Size	Load Index / Speed Symbol	
235/60ZR16	104W XL	
165/55R15	75V	
205/55ZR16	94W XL	
205/55ZR17	95V XL	
215/55ZR17	98W XL	
225/55ZR17	101W XL	
235/55ZR17	103W XL	
165/50R16	77V XL	
195/50R16	88V XL	
205/50ZR16	91W XL	
205/50ZR17	93W XL	
215/50ZR17	95W XL	
225/50ZR17	98W XL	
245/50ZR17	99W	
225/50ZR18	99W XL	

Upcoming Sizes		
Size	Load Index / Speed Symbol	
235/50ZR18	101Y XL	
215/45ZR17	91W XL	
225/45ZR17	94W XL	
225/45ZR18	95Y XL	
235/45ZR18	98Y XL	
245/45ZR18	100Y XL	
225/45ZR19	96W XL	
235/45ZR19	99Y XL	
245/45ZR19	102Y XL	
245/45ZR20	103Y XL	
205/40ZR17	84W XL	
255/40ZR17	98W XL	
205/40ZR18	86Y XL	
215/40ZR18	89Y XL	
225/40ZR18	92Y XL	

Upcoming Sizes		
Size	Load Index / Speed Symbol	
235/40ZR18	95Y XL	
245/40ZR18	97Y XL	
235/40ZR19	96Y XL	
245/40ZR19	98Y XL	
225/40ZR20	101W XL	
245/40ZR20	99Y XL	
245/35ZR18	92Y XL	
255/35ZR18	94Y XL	
225/35ZR19	88Y XL	
235/35ZR19	91Y XL	
245/35ZR19	93Y XL	
255/35ZR19	96Y XL	
245/35ZR20	95Y XL	
285/35ZR22	106W XL	



» [ACCELERATYRE.CO.UK](https://www.acceleratyre.co.uk)

accelera
SPEED 'N STYLE TYRES

CONTACT US: